

SPIELO PRODIGI VU

OPEN MAIN DOOR

Step 1: Turn audit key to disable alarm.

Step 2: Insert key into main door lock and turn.

Step 3: Lift up on latch and open door. Door opens to the left.



AUDIT KEY

MAIN DOOR LOCK

LATCH

POWER RESET TERMINAL

Step 1: Open main door.

Step 2: Locate power switch to left of bill validator.

Step 3: Turn switch to OFF (O) position, leave power off for 30 seconds and then turn to ON (I) position.




POWER SWITCH

CLEAR BILL VALIDATOR JAM

Step 1: Pull up on silver release lever at base of validator unit and remove.

Step 2: Open validator unit from top by sliding yellow cover forward, and pull up.

Step 3: Remove debris and ensure lenses are clean, if not, wipe with slightly damp cloth. Secure unit back in place. Make sure bill validator initializes.

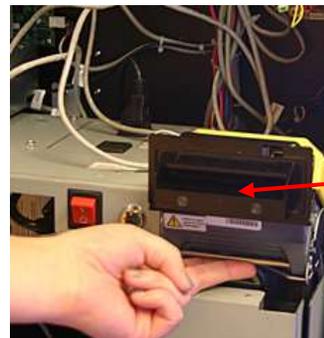

VALIDATOR UNIT

REMOVE CASH BOX

Step 1: Unlock cash box panel door.

Step 2: Pull on cash box handle to remove cash box.

Step 3: Unlock cash box lock by inserting coin/back of key, check for jams or empty.

Step 4: Close cash box door and lock by turning slot in horizontal position.


Step 5: Make sure bill validator initializes when cash box is inserted.



SPIELO PRODIGI VU

LOAD PAPER

Step 1: Load paper ticket stack in tray with print and clock mark facing up. Printer will beep if not loaded correctly. Printer may be pulled forward a few inches for access.

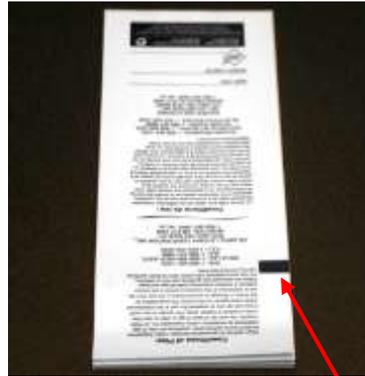

TICKET CLOCK MARK

Step 2: Feed ticket into printer mechanism until resistance is felt.


Step 3: Printer will automatically pull ticket in and align.

CLEAR PRINTER JAM

Step 1: Slide paper tray forward a few inches to access printer.

Step 2: Slide yellow release lever toward you and lift out blue paper guide.


Step 3: Place thumb on indent and push firmly down to remove printer roller.

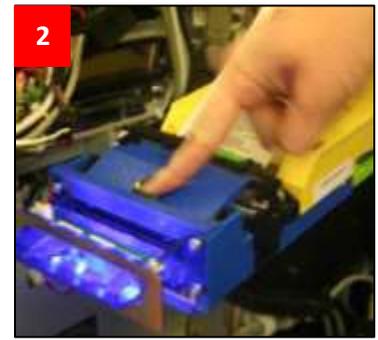

RELEASE LEVER

Step 4: Remove paper jam, insert printer roller and paper guide.

Step 5: Reload paper and slide printer back in.

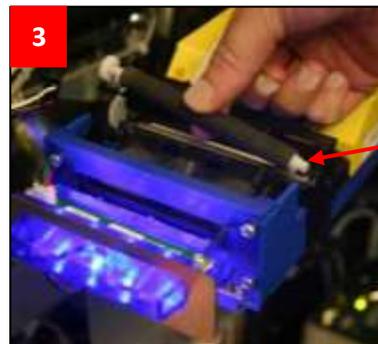

PRINTER ROLLER

LAST TICKET REPRINT

Step 1: Turn audit key.

Step 2: Open main door.

Step 3: Press [HISTORY].

Step 4: Press [TICKETS OUT]. Press [PRINT LAST CASHOUT] situated bottom of screen.

SPIELO PRODIGI VU

TOUCH SCREEN CALIBRATION

Step 1: Turn audit key.

Step 2: Choose illuminated button on button panel or calibrate touch screen icon on main screen.



Step 3: Calibrate touch screen message will display.

Step 4: Touch plus symbol (+) and hold for a few seconds. Repeat each time it moves to a new location on the screen.

Step 5: When calibration is complete, an exit button will display.

Step 6: Select [EXIT] button to return to main screen.



DISABLE TERMINAL

Step 1: Turn audit key.

Step 2: Press [OUT OF SERVICE] and a checkmark will appear. This feature will disable the terminal until a technician arrives.

